

LOW PROFILE PALETT TRUCK




Low-profile Pallet Truck(51MM/35MM) 1KG=2.2LB 1INCH=25.4MM

Item/Type		AC-Low-51mm	AC-Supper Low
Capacity Q	kg	1500	1000
Min. fork height h	mm	51	35
Max. fork height h _i	mm	165	90
Steering wheel	mm	φ 180x50	φ 160x50
Load roller Single	mm	φ 50x93	
Load roller Tandem	mm	φ 50x70	φ 34x58
Size of fork e*s	mm	160x37	160x30
Width overall forks B	mm	540/685/838	530/685
Fork length l	mm	1150/1220	1120

Conforms to EN 1757-2

- Easy access to the lowest pallets and containers with the minimum floor clearance of 35mm and 51mm only.
- Your handy choice to handle the low pallets which can only be handled by counterbalanced forklifts.

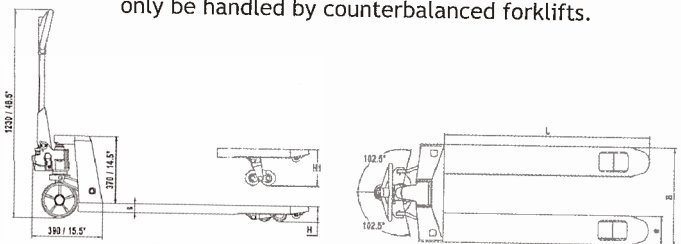

FOUR-WAY PALLET TRUCK

- Unique 4-directional hand pallet truck
- Special 4-directional movement capability provides the flexibility to maneuver wide loads through standard aisles.
- The additional set of wheels allows pallet truck to be moved sideways in addition to the conventional forward and back directions.
- With all the features and quality of our AC model standard hand pallet truck

SideRoller Pallet Truck		1KG=2.2LB 1INCH=25.4MM	
Capacity Q	kg	1500	
Min. fork height h	mm	85	
Max. fork height h _i	mm	85-170-210	
Steering wheel	mm	φ 200x50	
Load roller Single	mm	φ 78x70	
Load roller Tandem	mm	φ 65x60	
Size of fork e*s	mm	160x50	
Width overall forks B	mm	540	685
Fork length l	mm	1100/1150/1220	
Remarks Normal transportation	mm	85mm-170mm,2500kg	
Remarks Transverse transportation	mm	170mm-210mm,1500kg	

Conforms to EN 1757-2

